



Laminatoi sgrassatori per lastra e filo Rolling mills for plate and wire rough-rolling mills

FOX Type

LS 160x105R
LS 200x105R
LS 200x115R
LF 200x110
LF 250x115



mm	L	Ø
LS 160x105R	160	105
LS 200x105R	200	105
LS 200x115R	200	115





mm	L	Ø	□
LF 200	200	110	6,2÷1
LF 200x110	200	110	16÷6,8
LF 250x115	250	115	18,2÷6,75

Dimensioni
Dimensions



mm	L	P	H
LS 160x105R	1080	600	1610
LS 200x105R	1080	600	1610
LS 200x115R	1080	600	1610
LF 200x110	1080	600	1610
LF 250x115	1080	600	1610

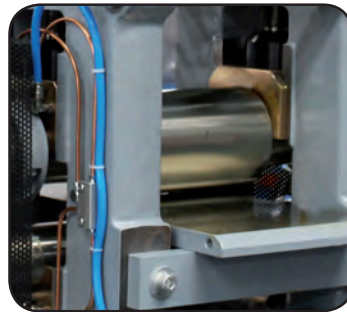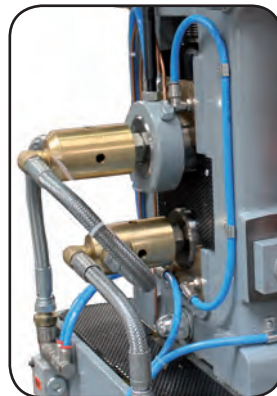

LS 200x105R

	u.m	lastra - plate			filo - wire	
modello / model articolo / item		LS 160x105R (L296100)**	LS 200x105R (L302100)**	LS 200x115R (L299100)	LF 200x110 (L421100)	LF 250x115 (L426100)
Larghezza dei cilindri Rolls width	mm	160	200	200	200	250
Diametro dei cilindri Rolls diameter	mm	105	105	115	110	115
Max. apertura cilindri Max. rolls opening	mm	42	42	42	42	42
Velocità di laminazione* Rolling speed	m/min	5,1	5,1	8,4	8	8,4
Supporto cilindri Rolls support	/	B	B	B	B	B
Coppia max di laminazione Max. rolling torque	kgm	350	350	320	230	320
Sforzo max di laminazione Max. rolling pressure	ton	42	47	44	38	49
Potenza motore Motor power	kW	5,5	5,5	7,5	5,5	7,5
Tensione Voltage	v Hz	230/400-3 50/60				
Peso Weight	Kg	840	850	900	850	900

* su richiesta comando a velocità variabile tramite inverter.

available on request drive with variable speed through digital inverter.

** Su richiesta modello senza raffreddamento cilindri e bronzine (art. L295100, L303100).

On request model without water-cooler system for rolls and bearings (art. L295100, L303100).

R: Raffreddamento cilindri e bronzine incluso per lastra / Cooling rolls and bronze bushings included for plate.

B: Supporti cilindri su bronzine / Rolls supports on bronze bushings.

Cilindri di ricambio Rolls spare part	LS 160x105R	LS 200x105R	LS 200x115R	LF 200x100	LF 250x115
- lastra / plate	L296801	L302801	L290801	---	---
- filo / wire	---	---	---	L421801	L426801