

Tronchesi di precisione
Precision cutters
Pinces coupantes de précision



Tipo "R" taglio filo raso


"R" type level wire cut

Type "R" taille fil ras

0429F/1 "2161" L = 130 mm

0429F/2 "2151" L = 115 mm

0429F/3 "2141" L = 100 mm



Tipo "LINDSTROM" taglio diagonale raso

Diagonal level cut

Taille diagonale ras

0429G/L8161 "L8161" L = 125 mm (ø 0,3 ÷ 2,0 mm)



Tipo "LINDSTROM" taglio diagonale filo raso

Diagonal level wire cut

Taille diagonale fil ras

0429G/L8148 "8148" L = 110 mm (ø 0,1 ÷ 0,8 mm)

0429G/L8152 "8152" L = 112,5 mm (ø 0,2 ÷ 1,25 mm)

0429G/L8162 "8162" L = 125 mm (ø 0,3 ÷ 1,6 mm)

0429G/L8165 "8165" L = 125 mm (ø 0,3 ÷ 1,6 mm)



Taglio laterale raso

Side level cut

Taille latérale ras

0429L/4130 "4130" L = 130 mm (ø 0,3 ÷ 1,5 mm)



"Belzer" taglio laterale filo raso

"Belzer" side level wire cut

"Belzer" taille latérale fil ras

0431/20 "2666/FK" L = 125 mm (ø 0,2 ÷ 1,25 mm)



0427A/06 Tipo "K" becchi conici, taglio filo raso, L = 160 mm

"K" type conical jaws, level wire cut, L = 160 mm

Type "K" becs conique, taille fil ras, L = 160 mm

Tronchesi di precisione

Precision cutters

Pinces coupantes de précision



"BELZER" taglio laterale semi-raso

"BELZER" side semi-level cut

"BELZER" taille latérale semi-ras

0431/12 "2667B" L = 125 mm

0431/13 "2674B" L = 140 mm



0426/2 Tipo "P" taglio laterale raso, L = 130 mm

"P" type side level cut, L = 130 mm

Type "P" taille latérale ras, L = 130 mm



Tipo "P" becchi conici, taglio raso, L = 120 mm

"P" type conical jaws, level cut, L = 120 mm

Type "P" becs coniques, taille ras L = 120 mm

0427/1 **Becchi normali / normal jaws / becs normaux**

0427/2 **Becchi sottili / fine jaws / becs fins**



0429C Tipo "P" taglio laterale, L = 180 mm

"P" type side cut, L = 180 mm

Type "P" taille latérale, L = 180 mm



Tipo "Dumont" taglio frontale raso

"Dumont" type front level cut

Type "Dumont" taille frontale ras

0428/1 **Testa diritta / straight head / tête droite, L = 110 mm**

0428/2 **Testa inclinata / angle cut / tête inclinée, L = 110 mm**



0429A Tipo "J" doppia leva, taglio laterale, L = 165 mm

"J" type, double lever, side cut, L = 165 mm

Type "J" double levier, taille latérale, L = 165 mm

Tronchesi di precisione

Precision cutters

Pinces coupantes de précision



Tipo "SW" doppia leva, taglio laterale

"SW" type double lever, side cut

Type "SW" double levier, taille latérale

0429E **Tronchese / nipper / tenaille coupante, L = 260 mm**

0429E/04 **Lama di ricambio / spare blade / lame de r change**

0429E/05 **Molla di ricambio / spare spring / ressort de r change**



0429E/20 **Tipo "MDM" doppia leva, taglio laterale, L = 240 mm**

"MDM" type double lever, side cut, L = 240 mm


Type "MDM" double levier, taille lat rale, L = 240 mm



0429E/61 **Tipo "K1850" tronchese sgrappolare, L = 200 mm**

"K1850" type, L = 200 mm

Type "K1850", L = 200 mm

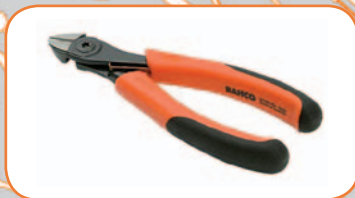

0429E/70 **Tipo "2101G" taglio laterale, L = 160 mm**

"2101G" type, side cut, L = 160 mm

Type "2101G" taille lat rale, L = 160 mm



0429M/10 **Tipo "PG58-G" taglio fisso raso, L = 160 mm**

"PG58-G" type side cut, L = 160 mm

Type "PG58-G" taille lat rale, L = 160 mm



0429M/1 **Tipo "PG30-58-R" taglio fisso raso, L = 140 mm**

"PG30-58-R" type, side cut, L = 140 mm

Type "PG30-58-R" taille lat rale, L = 140 mm